


TUBE ARCHITECTURAL DS-WS05-U

Ultra narrow optic LED Wall Mounts

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cylindrical profile perfect for accent lighting.





FEATURES

- High performance exterior rated LED pendant
- Fixture can install upside down to alter light distribution
- Aluminum construction
- 80,000 hour rated life
- 5 year warranty

SPECIFICATIONS

Input:	120V - 277VAC 50/60Hz
Dimming:	0 - 10V (120V-277V) ELV (120V)
Standards:	IP65 rated, ETL & cETL wet location listed
Operating Temp:	-25°C to 45°C

ORDERING NUMBER

Diameter	Watt	Color Temp	CRI	Lumen	Light Distribution	Finish	
DS-WS05	5" 11W	U827B	2700K	85	125	6° Ultra Narrow Towards the wall	BK Black 
		U830B	3000K	85	145		WT White 
		U835B	3500K	85	150		BZ Bronze 
		U840B	4000K	85	155		GH Graphite 

DS-WS05-U **B-**

Example: **DS-WS05-U30B-WT**

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122


Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

TUBE ARCHITECTURAL DS-WS05-U

Ultra Narrow Beam LED Wall Mounts

WAC LIGHTING

Responsible Lighting®

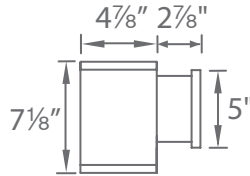

Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cylindrical profile perfect for accent lighting.

FEATURES


- High performance facade LED wall mount light
- Can be mounted upwards or downwards
- Solid aluminum construction
- 80,000 hour rated life
- 5 year warranty

SPECIFICATIONS

Input: 120V - 277VAC 50/60Hz
Dimming: 0 - 10V Dimming: 100% - 20%
 ELV 100% - 10% (120V only)
Standards: IP65 rated, ETL & cETL wet location listed
Operating Temp: -40°C to 40°C

PHOTOMETRY

Reads 0.2 footcandle at 15 feet distance

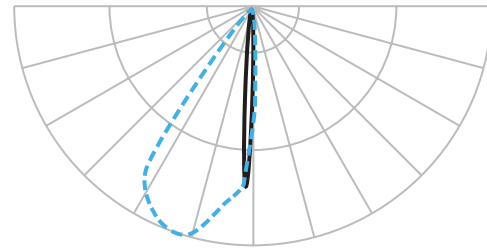

ORDERING NUMBER

Distribution	Diameter	Watt	Beam	Color Temp	CRI	Lumens	CBCP	Light Direction	Finish							
Single	DS-WS	05	5"	11W	U	6°	827	2700K	85	125	1182	B	Towards the wall			BK Black WT White BZ Bronze GH Graphite
							830	3000K	85	145	1363					
							835	3500K	85	150	1411					
							840	4000K	85	155	1462					

DS-WS05-U ___ B-___

Example: DS-WS05-U30B-WT

waclighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122


Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

TUBE ARCHITECTURAL DS-WD05-U

Ultra Narrow Beam LED Wall Mounts

WAC LIGHTING

Responsible Lighting®

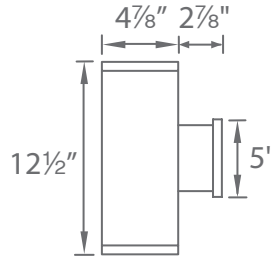

Fixture Type:

Catalog Number:

Project: _____


Location: _____

SPECIFICATIONS

Input: 120V - 277VAC 50/60Hz
Dimming: 0 - 10V Dimming: 100% - 20%
 ELV 100% - 10% (120V only)
Standards: IP65 rated, ETL & cETL wet location listed
Operating Temp: -40°C to 40°C

PHOTOMETRY

Reads 0.2 footcandle at 15 feet distance

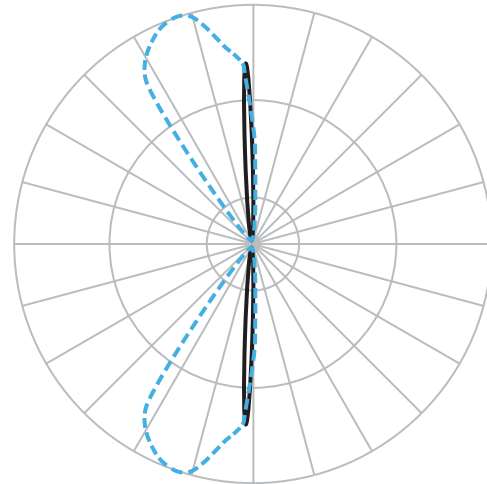

PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cylindrical profile perfect for accent lighting.

FEATURES

- High performance facade LED wall mount light
- Can be mounted upwards or downwards
- Solid aluminum construction
- 80,000 hour rated life
- 5 year warranty

ORDERING NUMBER

Distribution	Diameter	Watt	Beam	Color Temp	CRI	Lumens	CBCP	Light Direction	Finish
Double	DS-WD	05	5"	22W	U	6°	827 2700K 85 125 x2 1182 x2 830 3000K 85 145 x2 1363 x2 835 3500K 85 150 x2 1411 x2 840 4000K 85 155 x2 1462 x2	B Towards the wall	

DS-WD05-U ___ B-___

Example: DS-WD05-U30B-WT

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122


Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

TUBE ARCHITECTURAL DS-WS06-U

Ultra Narrow Beam LED Wall Mounts

WAC LIGHTING

Responsible Lighting®

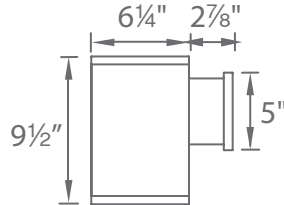

Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cylindrical profile perfect for accent lighting.

FEATURES


- High performance facade LED wall mount light
- Can be mounted upwards or downwards
- Solid aluminum construction
- 80,000 hour rated life
- 5 year warranty

SPECIFICATIONS

Input: 120V - 277VAC 50/60Hz
Dimming: 0 - 10V Dimming: 100% - 20%
 ELV 100% - 10% (120V only)
Standards: IP65 rated, ETL & cETL wet location listed
Operating Temp: -40°C to 40°C

PHOTOMETRY

Reads 0.2 footcandle at 15 feet distance

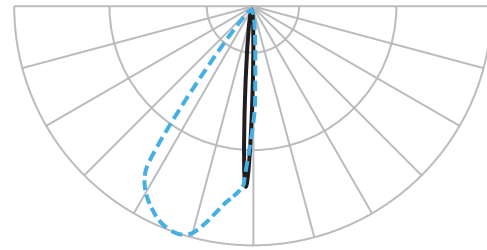

ORDERING NUMBER

Distribution	Diameter	Watt	Beam	Color Temp	CRI	Lumens	CBCP	Light Direction	Finish							
Single	DS-WS	06	6"	11W	U	6°	827	2700K	85	110	1239	B	Towards the wall			BK Black WT White BZ Bronze GH Graphite
							830	3000K	85	130	1428					
							835	3500K	85	130	1478					
							840	4000K	85	135	1532					

DS-WS06-U ___ B- ___

Example: DS-WS06-U30B-WT

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122


Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

TUBE ARCHITECTURAL DS-WD06-U

Ultra Narrow Beam LED Wall Mounts

WAC LIGHTING

Responsible Lighting®

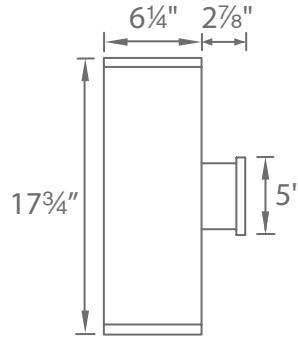

Fixture Type:

Catalog Number:

Project: _____


Location: _____

SPECIFICATIONS

Input: 120V - 277VAC 50/60Hz
Dimming: 0 - 10V Dimming: 100% - 20%
 ELV 100% - 10% (120V only)
Standards: IP65 rated, ETL & cETL wet location listed
Operating Temp: -40°C to 40°C

PHOTOMETRY

Reads 0.2 footcandle at 15 feet distance

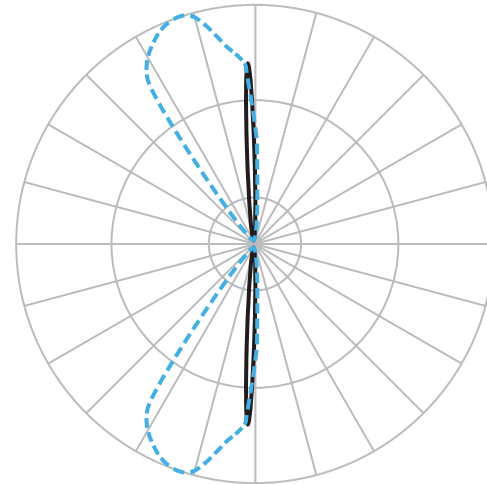

PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cylindrical profile perfect for accent lighting.

FEATURES

- High performance facade LED wall mount light
- Can be mounted upwards or downwards
- Solid aluminum construction
- 80,000 hour rated life
- 5 year warranty

ORDERING NUMBER

Distribution	Diameter	Watt	Beam	Color Temp	CRI	Lumens	CBCP	Light Direction	Finish
Double	DS-WD	06	6"	22W	U	6°	827 2700K 85 110 x2 1239 x2 830 3000K 85 130 x2 1428 x2 835 3500K 85 130 x2 1478 x2 840 4000K 85 135 x2 1532 x2	B Towards the wall	

DS-WD06-U ___ B- ___

Example: DS-WD06-U30B-WT

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122

Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760