

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Paloma LED522 22W W Track Luminaire

System Type & Voltage	Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish	
WTK-120 VAC WHK-277 VAC	LED522	F 24°	27 2700K - 85	1630	4048	BK Black PT Platinum WT White	
			30 3000K - 85	1695	4218		
			35 3000K - 85	1695	4218		
			35 3500K - 85	1745	4345		
			40 4000K - 85	1765	4385		
			927 2700K - 90	1355	3375		
			930 3000K - 90	1695	3500		
			N 24°	27 2700K - 85	1650		5928
				30 3000K - 85	1625		6177
		35 3000K - 85		1625	6177		
		35 3500K - 85		1675	6362		
		40 4000K - 85		1690	6422		
		927 2700K - 90		1301	4940		
		930 3000K - 90		1350	5125		
		S 19°		27 2700K - 85	1590	7622	
				30 3000K - 85	1655	7940	
			35 3000K - 85	1655	7940		
			35 3500K - 85	1705	8180		
			40 4000K - 85	1720	8257		
			927 2700K - 90	1325	6352		
			930 3000K - 90	1375	6590		

Example: **WHK-LED522F-27-BK**

DESCRIPTION

Paloma is a museum-quality LED luminaire with high-performance reflector optics. Available in 12W or 22W options in multiple color temperature, beam distribution, and finish options. Canopy is included with fixture. Monopoint can be ordered with an extension rod (6", 12", 18", 24", 36") to drop the head.

FEATURES

- Accommodates 1 filter lens or 1 accessory
- Integral selector to choose between independently controllable track circuits
- 365° horizontal rotation and 180° vertical aiming
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS


Construction:	Museum-quality LED luminaire with high performance reflector optics.
Power:	22W
Input:	120 VAC, 277 VAC, 50/60Hz
Dimming:	ELV: 100-10%
Light Source:	Integrated LED 3 Step Mac Adam Ellipse
Rated Life:	50000 Hours
Finish:	Electrostatically Powder Coated Black, White, Platinum
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Dry Location Listed



FINISHES



LINE DRAWING

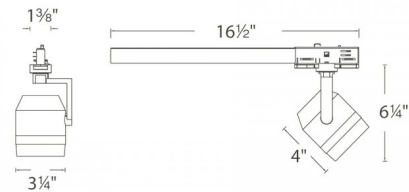

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Paloma LED522 22W W Track Luminaire

ACCESSORIES

	<i>Model</i>	<i>Description</i>	<i>Finish</i>
	LENS-20-AMB LENS-20-BLU	<i>Colored Lens</i> <i>Colored Lens</i>	<i>Amber</i> <i>Blue</i>
	LENS-20-CL	<i>Clear/Frosted Lens</i>	<i>Clear</i>
	LENS-20-SPR	<i>Spread Lens</i>	<i>Spread Lens</i>
	LENS-20-BEL	<i>Beam Elongating Lens</i>	<i>Beam Elongating</i>