


REFLEX – model: MO-LED17

LEDme® Display Spot Light - Canopy Mount

WAC LIGHTING

Responsible Lighting®

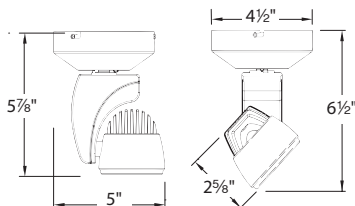

Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Multiple diodes LED compact canopy mounted luminaire.

FEATURES

- Clear and Frosted lens included
- 360° horizontal rotation and 180° vertical aiming
- Ceiling and wall mountable
- Free of projected heat, UV and IR radiation
- Replaceable LED module (consult factory)
- 100,000 hour rated life
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Die-cast aluminum construction

Input: 120V AC 50/60HZ

Light Source: 7 x 2.2W Cree LED
Total power consumption of 17W with integral driver

Dimming: May be dimmed to 10% with electronic low voltage (ELV) dimmer

Finish: Powder coated Black (BK) and White (WT)

Standards: ETL & cETL Damp Location Listed.

ORDER NUMBER

Model	Beam	Color Temp	CRI	Lumens	CBCP	Finish
MO-LED17 17W	S 20°	27 2700K	85	990	3440	BK Black WT White
		30 3000K	85	990	3590	
		35 3500K	85	1025	3420	
		40 4000K	85	1125	3780	
	F 45°	27 2700K	90	910	1225	BK Black WT White
		30 3000K	90	860	1145	
		35 3500K	85	950	1280	
		40 4000K	85	1035	1375	

MO-LED17 - - -

Example: MO-LED17S-27-WT

Accommodates one lens accessory

LENS ACCESSORIES

Amber	LENS-20-AMB
Blue	LENS-20-BLU
Green	LENS-20-GRN
Red	LENS-20-RED
Frost	LENS-20-FR
Spread Lens	LENS-20-SPR
Beam Elongating	LENS-20-BEL
UV Filter	LNES-20-UVF

GLARE CONTROL ACCESSORY

Honeycomb Louver	LENS-20-HCL
------------------	--------------------

EXTENSIONS Custom order as a complete unit. Ceiling mount only.

X6 6"	MOLED17	S F	27	BK WT	
X12 12"			30		
X18 18"			35		
X24 24"			40		
X36 36"					
X48 48"					

Example: X24-MOLED17S927BK

WAC Lighting

www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585