

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Corso Pendant

Pendant 3000K

Model & Size	Color Temp	Finish	Watt	LED Lumens	Delivered Lumens
PD-33718 18"	3000K	AL Brushed Aluminum	22.5W	1495	940
	3000K	BK Black	22.5W	1495	940
	3000K	WT White	22.5W	1495	940

Example: **PD-33718-AL**

### DESCRIPTION

A promenade of light delivered through a self illuminating halo within. A frosted acrylic diffuser conceals the high powered LEDs within the brushed aluminum spun metal shade. Corso is suspended on three thin low profile cables without the need for an additional power cord, lending to a simple and minimalistic design. Adjustable to different lengths through a push-pin locking mechanism at the canopy.

### FEATURES


- Minimalist look with no visible power cord
- Even illumination with no hotspots
- Cable suspension carrying low voltage may be field shortened
- Driver concealed within the canopy
- 5 year warranty

### SPECIFICATIONS


<b>Color Temp:</b>	3000K
<b>Input:</b>	120-277 VAC, 50/60Hz
<b>CRI:</b>	90, 80
<b>Dimming:</b>	ELV: 100 - 10%, 0-10V: 100 - 10%, 0-10V: 100 - 5%
<b>Rated Life:</b>	75000 Hours
<b>Mounting:</b>	Heavy gauge retention clips support trim firmly. Safety cabling standard.
<b>Standards:</b>	ETL, cETL, Title 24 JA8-2016 Compliant
	Damp Location Listed
<b>Construction:</b>	Aluminum body with acrylic diffuser



### FINISHES

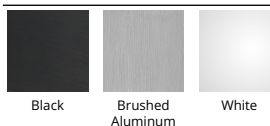

### LINE DRAWING

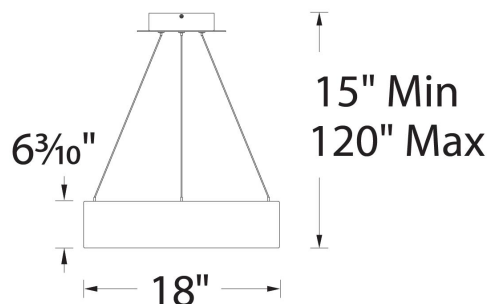

**PD-33718**

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Corso Pendant

Pendant 3000K

Model & Size	Color Temp	Finish	Watt	LED Lumens	Delivered Lumens
PD-33732 32"	3000K	AL Brushed Aluminum	88W	6340	4435
	3000K	BK Black	88W	6340	4435
	3000K	WT White	88W	6340	4435

Example: **PD-33732-AL**

### DESCRIPTION

A promenade of light delivered through a self illuminating halo within. A frosted acrylic diffuser conceals the high powered LEDs within the brushed aluminum spun metal shade. Corso is suspended on three thin low profile cables without the need for an additional power cord, lending to a simple and minimalistic design. Adjustable to different lengths through a push-pin locking mechanism at the canopy.

### FEATURES


- Minimalist look with no visible power cord
- Even illumination with no hotspots
- Cable suspension carrying low voltage may be field shortened
- Driver concealed within the canopy
- 5 year warranty

### SPECIFICATIONS


<b>Color Temp:</b>	3000K
<b>Input:</b>	120-277 VAC, 50/60Hz
<b>CRI:</b>	90, 80
<b>Dimming:</b>	ELV: 100 - 10%, 0-10V: 100 - 10%, 0-10V: 100 - 5%
<b>Rated Life:</b>	75000 Hours
<b>Mounting:</b>	Heavy gauge retention clips support trim firmly. Safety cabling standard.
<b>Standards:</b>	ETL, cETL, Title 24 JA8-2016 Compliant
	Damp Location Listed
<b>Construction:</b>	Aluminum body with acrylic diffuser



### FINISHES

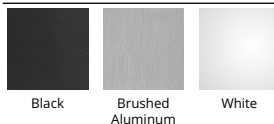

### LINE DRAWING

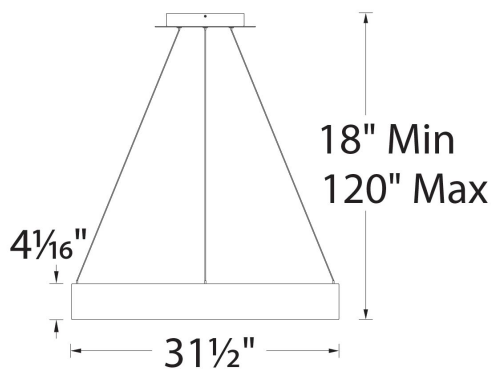

**PD-33732**

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Corso Pendant

Pendant 3000K

Model & Size	Color Temp	Finish	Watt	LED Lumens	Delivered Lumens
PD-33743 43"	3000K	AL Brushed Aluminum	125W	11115	7300
	3000K	BK Black	125W	11115	7300
	3000K	WT White	125W	11115	7300

Example: **PD-33743-AL**

### DESCRIPTION

A promenade of light delivered through a self illuminating halo within. A frosted acrylic diffuser conceals the high powered LEDs within the brushed aluminum spun metal shade. Corso is suspended on three thin low profile cables without the need for an additional power cord, lending to a simple and minimalistic design. Adjustable to different lengths through a push-pin locking mechanism at the canopy.

### FEATURES


- Minimalist look with no visible power cord
- Even illumination with no hotspots
- Cable suspension carrying low voltage may be field shortened
- Driver concealed within the canopy
- 5 year warranty

### SPECIFICATIONS


<b>Color Temp:</b>	3000K
<b>Input:</b>	120-277 VAC, 50/60Hz
<b>CRI:</b>	90, 80
<b>Dimming:</b>	ELV: 100 - 10%, 0-10V: 100 - 10%, 0-10V: 100 - 5%
<b>Rated Life:</b>	75000 Hours
<b>Mounting:</b>	Heavy gauge retention clips support trim firmly. Safety cabling standard.
<b>Standards:</b>	ETL, cETL, Title 24 JA8-2016 Compliant
	Damp Location Listed
<b>Construction:</b>	Aluminum body with acrylic diffuser



### FINISHES



### LINE DRAWING

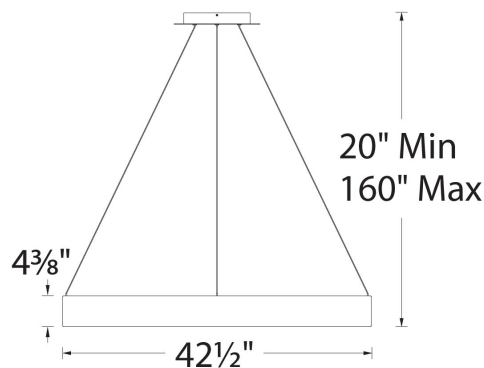

**PD-33743**

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Corso Pendant

Pendant 3000K

Model & Size	Color Temp	Finish	Watt	LED Lumens	Delivered Lumens
PD-33753 53"	3000K	AL Brushed Aluminum	169W	12028	8458
	3000K	BK Black	169W	12028	8458
	3000K	WT White	169W	12028	8458

Example: **PD-33753-AL**

### DESCRIPTION

A promenade of light delivered through a self illuminating halo within. A frosted acrylic diffuser conceals the high powered LEDs within the brushed aluminum spun metal shade. Corso is suspended on three thin low profile cables without the need for an additional power cord, lending to a simple and minimalistic design. Adjustable to different lengths through a push-pin locking mechanism at the canopy.

### FEATURES


- Minimalist look with no visible power cord
- Even illumination with no hotspots
- Cable suspension carrying low voltage may be field shortened
- Driver concealed within the canopy
- 5 year warranty

### SPECIFICATIONS


<b>Color Temp:</b>	3000K
<b>Input:</b>	120-277 VAC, 50/60Hz
<b>CRI:</b>	90, 80
<b>Dimming:</b>	ELV: 100 - 10%, 0-10V: 100 - 10%, 0-10V: 100 - 5%
<b>Rated Life:</b>	75000 Hours
<b>Mounting:</b>	Heavy gauge retention clips support trim firmly. Safety cabling standard.
<b>Standards:</b>	ETL, cETL, Title 24 JA8-2016 Compliant
	Damp Location Listed
<b>Construction:</b>	Aluminum body with acrylic diffuser



### FINISHES



### LINE DRAWING

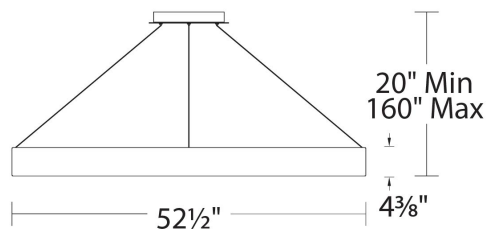

**PD-33753**