

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Voyager Chandelier 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
PD-40901 1 Ring	3000K 90	BK Black	43W	2160	1270	Yes
	3000K 90	SN Satin Nickel	43W	2160	1270	Yes

Example: **PD-40901-BK**

DESCRIPTION

A gateway to another world of design and technology.

FEATURES

- Can be mounted on a sloped ceiling
- Thin powered cables provide an ultra-clean look
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%
Rated Life:	50000 Hours
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Aluminum body with acrylic diffuser



FINISHES



LINE DRAWING

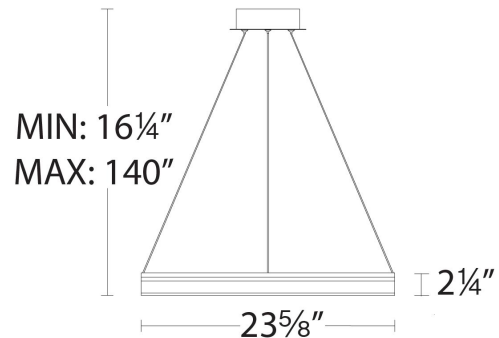

PD-40901

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Voyager Chandelier 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
PD-40902 2 Ring	3000K 90	BK Black	70W	3530	2060	Yes
	3000K 90	SN Satin Nickel	70W	3530	2060	Yes

Example: **PD-40902-BK**

DESCRIPTION

A gateway to another world of design and technology.

FEATURES

- Can be mounted on a sloped ceiling
- Thin powered cables provide an ultra-clean look
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%
Rated Life:	50000 Hours
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Aluminum body with acrylic diffuser




FINISHES



Black Satin Nickel

LINE DRAWING

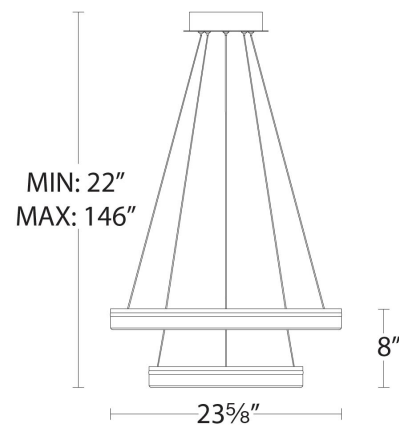

PD-40902

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Voyager Chandelier 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
PD-40903 3 Ring	3000K 90	BK Black	122W	5550	3150	Yes
	3000K 90	SN Satin Nickel	122W	5550	3150	Yes

Example: **PD-40903-BK**

DESCRIPTION

A gateway to another world of design and technology.

FEATURES

- Can be mounted on a sloped ceiling
- Thin powered cables provide an ultra-clean look
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%
Rated Life:	50000 Hours
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Aluminum body with acrylic diffuser



FINISHES



LINE DRAWING

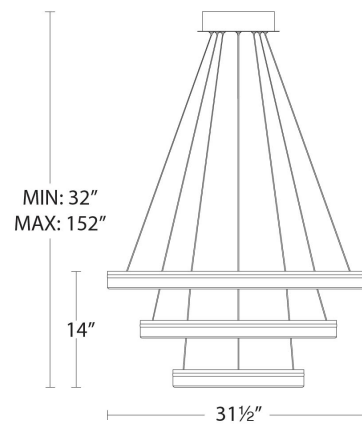

PD-40903