


# TUBE ARCHITECTURAL DS-PD05

## LED Pendant Mounts

# WAC LIGHTING

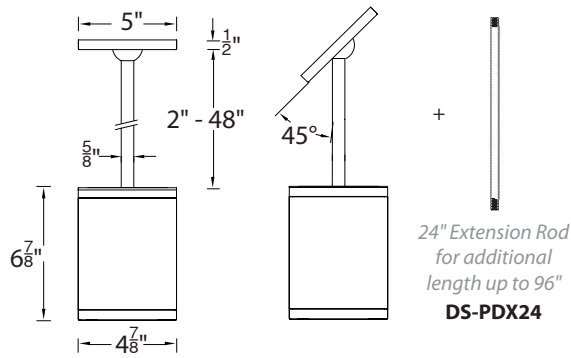

Seismic swivel tilts up to 45° to accommodate sloped ceiling

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent lighting. Comes in various light beam angle options.

### FEATURES

- High performance exterior rated LED pendant
- Includes 45° swivel canopy and 2 field cuttable 24" rods
- Solid aluminum construction
- 39° visual cutoff angle for glare control
- 5 year warranty

### SPECIFICATIONS

- Input:** Universal voltage 120V - 277VAC, 50/60Hz
- Dimming:** Electronic low voltage (ELV) : 100% - 5%  
0-10V: 100% - 1%
- Light Source:** High output 3 Step Mac Adam Ellipse COB  
Rated life of 60,000 hours at L70
- Finish:** Electrostatically powder coated, white, black, bronze and graphite
- Standards:** IP65 rated, ETL & cETL wet location listed, Energy Star® 2.2 rated Title 24 JA8-2016 Compliant
- Operating Temp:** -13°F to 122°F (-25°C to 50°C)

### ORDERING NUMBER

| Diameter | Watt   | Beam      | Beam Angle | Color Temp  | CRI | Reference Output <sup>1</sup> | Efficacy | Light Distribution | Finish |  |    |  |
|----------|--------|-----------|------------|-------------|-----|-------------------------------|----------|--------------------|--------|--|----|--|
|          |        |           |            |             |     | Lumen                         | CBCP     | (Lm/W)             |        |  |    |  |
| DS-PD05  | 5" 25W | S<br>Spot | 16°        | 927 2700K   | 90  | 1825                          | 10050    | 73                 |        | <b>BK</b> Black<br><b>WT</b> White<br><b>BZ</b> Bronze<br><b>GH</b> Graphite |    |  |
|          |        |           |            | 27 2700K    | 85  | 2190                          | 12057    | 88                 |        |  |    |  |
|          |        |           |            | 930 3000K   | 90  | 1895                          | 10427    | 76                 |        |  |    |  |
|          |        |           |            | 30 3000K    | 85  | 2300                          | 12644    | 92                 |        |  |    |  |
|          |        |           |            | 35 3500K    | 85  | 2350                          | 12937    | 94                 |        |  |    |  |
|          |        |           |            | 40 4000K    | 85  | 2375                          | 13062    | 95                 |        |  |    |  |
|          |        | DS-PD0517 | 5" 17W     | N<br>Narrow | 25° | 927 2700K                     | 90       | 1810               | 5280   |  | 72 |  |
|          |        |           |            |             |     | 27 2700K                      | 85       | 2170               | 6335   |  | 87 |  |
|          |        |           |            |             |     | 930 3000K                     | 90       | 1880               | 5478   |  | 75 |  |
|          |        |           |            |             |     | 30 3000K                      | 85       | 2275               | 6643   |  | 91 |  |
|          |        |           |            |             |     | 35 3500K                      | 85       | 2330               | 6797   |  | 93 |  |
|          |        |           |            |             |     | 40 4000K                      | 85       | 2350               | 6863   |  | 94 |  |
|          |        | DS-PD0517 | 5" 17W     | F<br>Flood  | 33° | 927 2700K                     | 90       | 1900               | 4515   |  | 76 |  |
|          |        |           |            |             |     | 27 2700K                      | 85       | 2280               | 5417   |  | 91 |  |
|          |        |           |            |             |     | 930 3000K                     | 90       | 1970               | 4685   |  | 79 |  |
| 30 3000K | 85     |           |            |             |     | 2390                          | 5681     | 96                 |        |  |    |  |
| 35 3500K | 85     |           |            |             |     | 2445                          | 5812     | 98                 |        |  |    |  |
| 40 4000K | 85     |           |            |             |     | 2470                          | 5870     | 99                 |        |  |    |  |

DS-PD05-\_\_\_\_\_ - \_\_\_\_\_ <sup>1</sup>Reference output shows 25W output. Multiply by 0.7 to determine output for 17W combinations.

Example: DS-PD05-S930-WT

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

# TUBE ARCHITECTURAL DS-PD05

## LED Pendant Mounts

# WAC LIGHTING

Responsible Lighting®

### MOUNTING ACCESSORIES

|   |                      |                 |   |                           |   |
|---|----------------------|-----------------|---|---------------------------|---|
|  | <i>Extension Rod</i> | <b>DS-PDX24</b> | <i>One 24" extension rod for DS-PDSK<br/>Can be field cut</i> | <b>Finish</b>             |   |
|   |                      |                 |   | <b>BK</b> <i>Black</i>    |  |
|   |                      |                 |   | <b>WT</b> <i>White</i>    |  |
|   |                      |                 |   | <b>BZ</b> <i>Bronze</i>   |  |
|   |                      |                 |   | <b>GH</b> <i>Graphite</i> |  |

Example: **DS-PDX24-WT**

waclighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760