

# WAC LIGHTING

## Dune 826

### Low Voltage Track Luminaire

System Type & Voltage	Model & Wattage	Finish
-HHT H Track - 120 VAC	826 50W	BK Black
-JHT J/J2 Track - 120 VAC	826L 75W	BN Brushed Nickel
-LHT L Track - 120 VAC		WT White

Example: **HHT-826-BK**

#### DESCRIPTION

Dune is a unique spot light with solid construction and simple aiming features for easy adjustments. Low Voltage track fixture offered in a wide variety of styles and finishes for a multitude of lighting applications in residential, retail, commercial and hospitality environments. Available in H, J/J2, and L style track configurations. Built-in transformer has a 1W minimum load and can be installed with an LED lamp.

#### FEATURES

- Available with LED lamp option
- 350° horizontal rotation and 90° vertical tilt
- Loop back aiming arm for simple adjustments
- Screw on lens cap
- Clear lens included
- Transformer concealed within the fixture
- 5 year warranty


#### SPECIFICATIONS

<b>Construction:</b>	Die-cast aluminum track head with polycarbonate transformer case and track adapter. Bi-pin ceramic socket for MR16 lamp., Die-cast aluminum fixture with polycarbonate track adapter. Heat resistant rubber grips over rear socket assemblies. Ceramic bi-pin sockets.
<b>Power:</b>	75W, 50W
<b>Input:</b>	120 VAC, 50/60Hz
<b>Dimming:</b>	ELV: 100-15%
<b>Light Source:</b>	MR16 ( Order separately )
<b>Finish:</b>	Body Electrostatically powder Coated White, Electroplated Brushed Nickel, Body Electrostatically powder Coated Black
<b>Operating Temp:</b>	-4°F to 104°F (-20°C to 40°C)
<b>Standards:</b>	UL, cUL, Dry Location Listed


Fixture Type: \_\_\_\_\_  
 Catalog Number: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Location: \_\_\_\_\_



#### FINISHES



#### LINE DRAWING

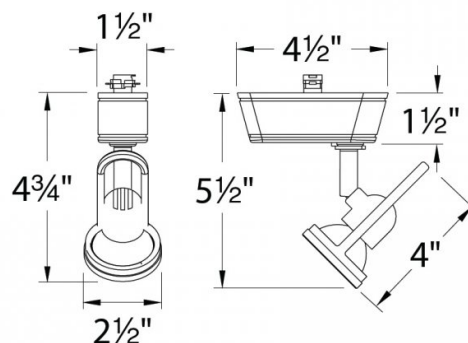

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_







Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Dune 826

Low Voltage Track Luminaire

### ACCESSORIES

	<i>Model</i>	<i>Description</i>	<i>Finish</i>
	<b>LENS-16-AMB</b> <b>LENS-16-BLU</b> <b>LENS-16-GRN</b> <b>LENS-16-RED</b>	<i>Colored Lens</i> <i>Colored Lens</i> <i>Colored Lens</i> <i>Colored Lens</i>	<i>Amber</i> <i>Blue</i> <i>Green</i> <i>Red</i>
	<b>LENS-16-FR</b>	<i>Clear/Frosted Lens</i>	<i>Frosted</i>
	<b>LENS-16-SPR</b>	<i>Spread Lens</i>	<i>Spread Lens</i>
	<b>LENS-16-UVF</b>	<i>UV Filter lens</i>	<i>Clear</i>
	<b>LENS-16-BEL</b>	<i>Beam Elongating Lens</i>	<i>Beam Elongating</i>
	<b>LENS-16-HCL</b>	<i>Honeycomb Louver</i>	<i>Black</i>