

ADJUSTABLE WALL WASH – 5028W

Monopoint Luminaires

WAC LIGHTING




Fixture Type:

Catalog Number:

Project:

Location:

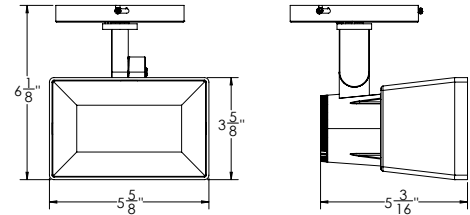

PRODUCT DESCRIPTION

With the ability to achieve beam distributions of 3x4 to 5x6 (46° by 70° to 100° by 120° NEMA distribution) proportions and more, expect a uniform beam wash of light in a fixture that can adapt to changing needs. A powerhouse all-in-one unit in 120-277V provides the ability of rotating fixture head for vertical distribution and the ability to be dimmed, while being compatible with a range of lens and anti-glare accessories.

FEATURES

- Continuously adjustable beam angles from 46° by 70° to 1000° by 120° (NEMA 3x4 to NEMA 5x6)
- Rotate fixture head for vertical distribution
- 365° horizontal aiming and 90° vertical aiming
- Ceiling and wall mountable
- Accommodates one lens and one glare control accessory
- Solid corrosion resistant aluminum alloy
- Patents Pending
- 50,000 hour rated life
- 5-year WAC Lighting product warranty

SPECIFICATIONS

- Construction:** Die-cast aluminum body with driver enclosed in canopy.
- Input:** 120 - 277VAC, 50/60Hz
- Power:** 28W
- Light Source:** High output LED
- Dimming:** 100%-5% Electronic Low Voltage (ELV) or 0 - 10V
- Finish:** Electrostatically powder coated White, Black
- Standards:** ETL & cETL Damp Location Listed.

Model	Lumens	CBCP	Color Temp	CRI	Finish
MO-5028W	1925	745			
	2000	775	927 2700K 90		BK Black WT White
	2025	785	930 3000K 90		
	2070	800	935 3500K 90		
		940 4000K 90			

MO-5028W-____-____

Example: MO-5028W-930-WT

GLARE CONTROL ACCESSORIES

	5028-SHR-BK 5028-SHR-WT 5028-SHR-PT
	5028-HSHR-BK 5028-HSHR-WT 5028-HSHR-PT
	5028-VSHR-BK 5028-VSHR-WT 5028-VSHR-PT

LENS ACCESSORIES

Amber	4LENS-3X5-AMB	Frosted	4LENS-3X5-FR
Blue	4LENS-3X5-BLU	Spread	4LENS-3X5-SPR
Green	4LENS-3X5-GRN	Beam Elongating	4LENS-3X5-BEL
Red	4LENS-3X5-RED		

WAC Lighting

www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050



Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585

ADJUSTABLE WALL WASH – 5028W

Monopoint Luminaires

WAC LIGHTING

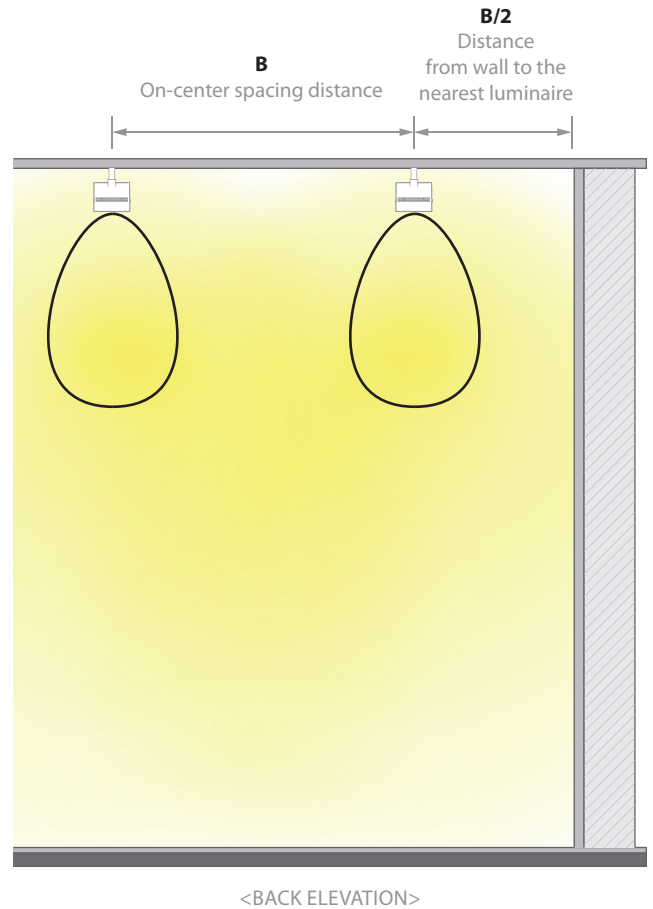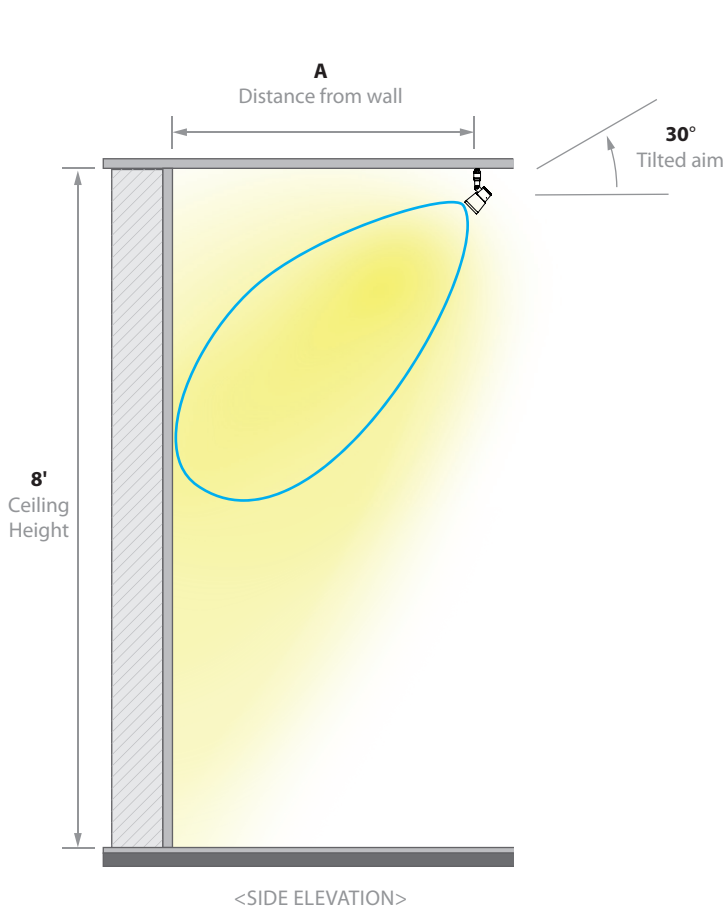


AVERAGE WALL ILLUMINANCE

Horizontal	A Distance from wall	B On-center spacing distance	
		3 feet	5 feet
3X4	3 feet	16	10
	5 feet	12	7.6
4X5	3 feet	30	19
	5 feet	23	15
5X6	3 feet	41	26
	5 feet	32	21

Vertical	A Distance from wall	B On-center spacing distance	
		3 feet	5 feet
3X4	3 feet	16	9.83
	5 feet	12	7.47
4X5	3 feet	28	18
	5 feet	22	14
5X6	3 feet	38	24
	5 feet	30	19

PHOTOMETRY

Shown when fixture is aimed towards the ground (nadir)



Results may vary depending on surface properties, ambient light levels, etc.

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585