

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Chamber

Outdoor Wall Sconce 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
WS-W48612 12"	3000K 90	BK Black	9.5W	800	213	Yes
	3000K 90	BZ Bronze	9.5W	800	213	Yes

Example: **WS-W48612-BK**

• For 277V special order, add an "F" before the finish: WS-W48625F-BZ

DESCRIPTION

A Mid-Century modern inspired design with solid casted aluminum that shelters an advanced LED light engine within the inner chamber to provide maintenance-free illumination for many years. Chamber features a collection of wet location listed wall sconces, pendants, and post lights for consistency in design throughout any project.

FEATURES


- Minimal mounting hardware for easy installation
- Light engine is factory sealed for maximum protection from the elements
- Weather resistant powder coated finish
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%
Rated Life:	50000 Hours, 44000 Hours
Mounting:	Can be mounted on wall vertically or upside down
Standards:	ETL, cETL, IP65, Title 24 JA8-2016 Compliant, Dark Sky Friendly Wet Location Listed
Construction:	Aluminum hardware with etched glass lens




FINISHES



Black Bronze

LINE DRAWING

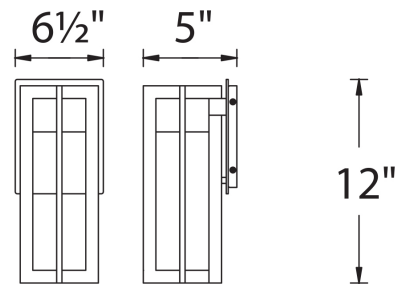

WS-W48612

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Chamber

Outdoor Wall Sconce 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
WS-W48616 16"	3000K 90	BK Black	12W	1000	255	Yes
	3000K 90	BZ Bronze	12W	1000	255	Yes

Example: **WS-W48616-BK**

- For 277V special order, add an "F" before the finish: WS-W48625F-BZ

DESCRIPTION

A Mid-Century modern inspired design with solid casted aluminum that shelters an advanced LED light engine within the inner chamber to provide maintenance-free illumination for many years. Chamber features a collection of wet location listed wall sconces, pendants, and post lights for consistency in design throughout any project.

FEATURES


- Minimal mounting hardware for easy installation
- Light engine is factory sealed for maximum protection from the elements
- Weather resistant powder coated finish
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%
Rated Life:	50000 Hours, 44000 Hours
Mounting:	Can be mounted on wall vertically or upside down
Standards:	ETL, cETL, IP65, Title 24 JA8-2016 Compliant, Dark Sky Friendly Wet Location Listed
Construction:	Aluminum hardware with etched glass lens




FINISHES



Black Bronze

LINE DRAWING

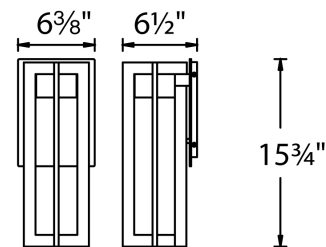

WS-W48616

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Chamber

Outdoor Wall Sconce 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
WS-W48625 25"	3000K 90	BK Black	22W	1800	605	Yes
	3000K 90	BZ Bronze	22W	1800	605	Yes

Example: **WS-W48625-BK**

- For 277V special order, add an "F" before the finish: WS-W48625F-BZ

DESCRIPTION

A Mid-Century modern inspired design with solid casted aluminum that shelters an advanced LED light engine within the inner chamber to provide maintenance-free illumination for many years. Chamber features a collection of wet location listed wall sconces, pendants, and post lights for consistency in design throughout any project.

FEATURES

- Minimal mounting hardware for easy installation
- Light engine is factory sealed for maximum protection from the elements
- Weather resistant powder coated finish
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%
Rated Life:	50000 Hours, 44000 Hours
Mounting:	Can be mounted on wall vertically or upside down
Standards:	ETL, cETL, IP65, Title 24 JA8-2016 Compliant, Dark Sky Friendly Wet Location Listed
Construction:	Aluminum hardware with etched glass lens

FINISHES



Black Bronze

LINE DRAWING

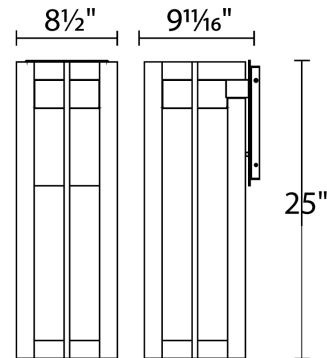

WS-W48625